

C6 PATCH PANEL UTP 50u

Performance:
Meets C6 EIA/TIA 568B Standard.

Materials:

- Front Plate : Fireproof ABS UL-94V0
- Panel : Metal (SPCC)
- Cable Management : Metal (SPCC)
- Jack : 8P8C 50 micro inches gold plated
- PCB : FR-4 / UL-94V0
- IDC Body : Fireproof ABS UL-94V0
- IDC Pin : Bronze & Tinned


IDC Description : For 22-26 AWG.
For 110 or Krone punch-down Tool

Electrical Specifications:

- Insulation Resistance : 500M ohms (min.)
- Contact Resistance : 20m ohms (max.)
- Current Rating : 1.5 Amps .
- DC Resistance : 0.1 ohms (max.)
- Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:


- IDC Punch Down Cycle : Over 250 Cycles (min.)
- Jack Insertion Cycle : Over 2000 Cycles (min.)
- Operation Temperature : -40 °C ~ +70 °C

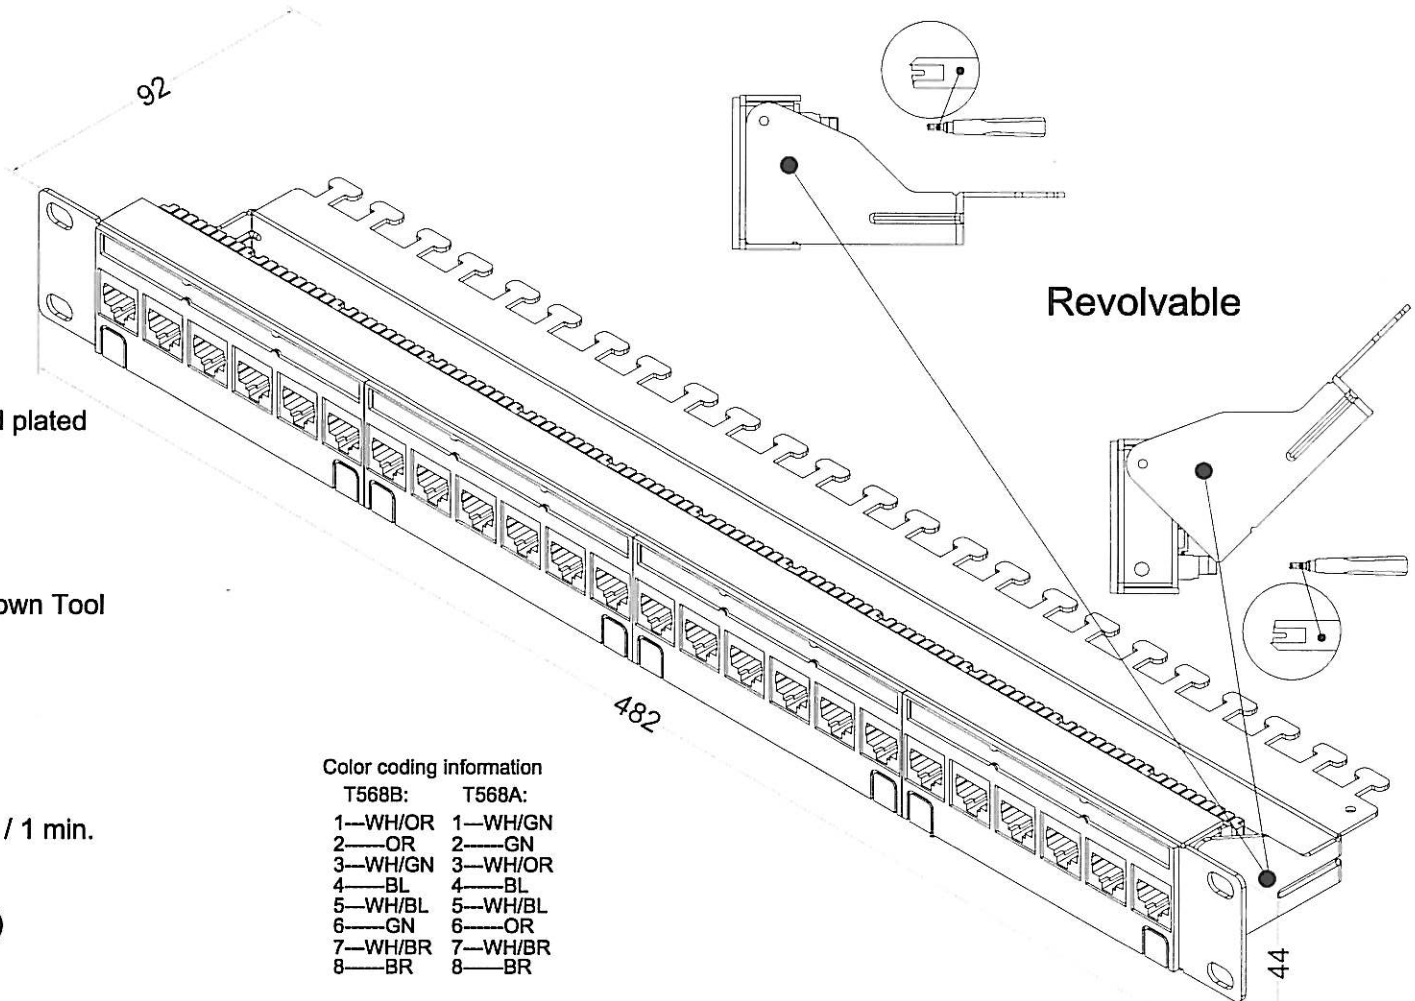

Color coding information

- | | |
|---------|---------|
| T568B: | T568A: |
| 1—WH/OR | 1—WH/GN |
| 2—OR | 2—GN |
| 3—WH/GN | 3—WH/OR |
| 4—BL | 4—BL |
| 5—WH/BL | 5—WH/BL |
| 6—GN | 6—OR |
| 7—WH/BR | 7—WH/BR |
| 8—BR | 8—BR |

accessories



Marking:

Printed Letter:


Packing:

1 pc / AMDEX color box
10 pcs / carton

Cat.6

AMDEX

 N3674

DRAW NO:		ITEM NO:	DA620
 APPR		CUSTOMER:	
UNIT: m/m	DESIGN	DATE:	
SCALE:	Ref. NO:	TOLERANCE:	· ± 1 · X ± 0.2 · XX ± 0.15

AMDEX